

>>> CSM 15-50 DRD 40-50

>>> DRD 10-50 PM

Oil-injected screw compressors Fixed and variable speed





## **CECCATO HISTORY**



#### Reliability

- » Designed with 75 years industry experience
- » Careful qualification of components
- » Continuous endurance testing
- » World class branded electricals

## **Outstanding Efficiency**

- » Models to surpass industry standards
- » Industry leading air end
- » World renowned electrical motor
- » Large separator with 3 stage seperation
- » Suitable for 46°C ambient conditions

### **Highest Quality Standards**

- » ISO9001 ISO14001 quality assurance
- » OHSAS 18001 quality assurance
- » End to end quality testing procedure

#### **Service Friendly**

- » Easy access to all service components
- » Tilt & swing separator cover with hinge
- » Minimum downtime at service intervention
- » Long service components

#### Options to suit every industry


- » Options to suit many industrial applications
- » Options to extend the service lifetime
- » Options to reach highest industrial efficiency
- » Witness certificates for regulatory requirements

# >>> Ceccato History



Start of piston compressor production

Worldwide leader in the production and distribution of compressed air products and solutions with 3 production facilities around the world.

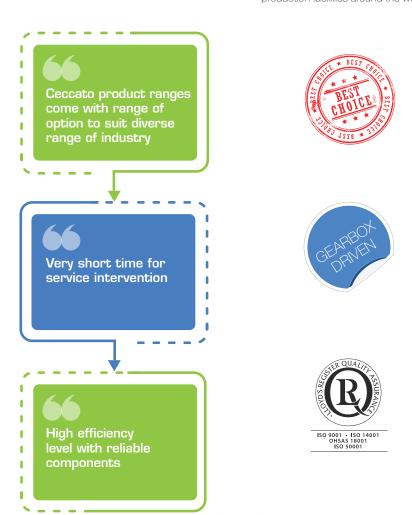



Only original parts extend your compressor's lifetime, reduce maintenance costs and maximize efficiency



# FIXED SPEED COMPRESSOR 15-50HP/11-37KW



# Customer benefits: CSM 15-50, DRD 40-50

Gearbox driven compressors are suitable for use with a variety of constant speed or variable speed drivers. Local energy costs and application requirements will determine the most economical method of drive for your application. We offer you:

- Easy maintenance
- User-friendly operation
- Simple installation
- Highest performance for less energy consumption
- Lower maintenance cost
- No transmission losses

# >>> Components



Motor

Emergency stop

Oil-separator vessel

ES4000T controller

Element

Air filter







#### Technical data

Mpa 0.7 0.8 1 0.	15 20 25	11 15 18.5	Cap I/S 30 30 23 38 37 33 51	cfm 63 63 48 79 79 70 107	Noise dB(A)±2 69 71	Weight KG 293	3/4" 3/4"	Dimension LxHxW(mm)  850*790*1260
0.7 0.8 1 0.7 0.8 1 0.7 0.8 1	15	11	30 30 23 38 37 33 51	63 63 48 79 79	69	293		850*790*1260
0.8 1 0.7 0.8 1 0.7 0.8 1	20	15	30 23 38 37 33 51	63 48 79 79 70				
1 0.7 0.8 1 0.7 0.8 1	20	15	23 38 37 33 51	48 79 79 70				
0.7 0.8 1 0.7 0.8 1			38 37 33 51	79 79 70	71	341	3/4"	850*790*1260
0.8 1 0.7 0.8 1			37 33 51	79 70	71	341	3/4"	850*790*1260
1 0.7 0.8 1			33 51	70	71	341	3/4"	850*790*1260
0.7 0.8 1	25	18.5	51					
0.8 1	25	18.5		107				
1	25	18.5	50					
				106	73	364	1"	850*790*1260
0.7			43	91				
			61	129				
8.0	30	22	59	125	0	О	1"	950*850*1080
1			53	112				
0.7			89	189				
0.8	40	30	83	176	72	559	1 1/2"	1430*950*1200
1			74	157				
			110	233				
	50	37			72	600	1 1/2"	1430*950*1200
0.7			94	198				
0.8	40	30	88	185	69	821	1 1/2"	1723*980*1600
1			79	168				
0.7			113	240				
	50	37			70	846	1 1/2"	1723*980*1600
0.0						040	1 1/2	1720 000 1000
	0.7 0.8 1 0.7 0.8 1 0.7 0.8	0.7 0.8 1 0.7 0.8 40 1 0.7	0.7 0.8 1 0.7 0.8 40 30 1 0.7 0.8 50 37	0.7     110       0.8     50     37     105       1     85       0.7     94       0.8     40     30     88       1     79       0.7     113       0.8     50     37     106	0.7     110     233       0.8     50     37     105     222       1     85     180       0.7     94     198       0.8     40     30     88     185       1     79     168       0.7     113     240       0.8     50     37     106     223	0.7     110     233       0.8     50     37     105     222     72       1     85     180       0.7     94     198       0.8     40     30     88     185     69       1     79     168       0.7     113     240       0.8     50     37     106     223     70	0.7     0.8     50     37     110     233     72     600       1     85     180     72     600       0.7     94     198     94     198       0.8     40     30     88     185     69     821       1     79     168       0.7     113     240       0.8     50     37     106     223     70     846	0.7     0.8     50     37     110     233       1     105     222     72     600     1 1/2"       0.7     94     198       0.8     40     30     88     185     69     821     1 1/2"       1     79     168       0.7     113     240       0.8     50     37     106     223     70     846     1 1/2"

## **VARIABLE SPEED COMPRESSOR**

# >>> Your energy efficient and solid performance

# THE HIGH PERFORMANCE DRIVE TRAIN

- In-house design on oil-cooled permanent magnetic motor
- High performance and durable reliability
- Service free drive train





# ROBUST, COMPACT AND USER-FRIENDLY FREQUENCY INVERTER

- Industrial inverter works on minimum start-up power consumption
- Contribute to minimum power consumption on lower and lower operation cost

#### **ES4000T TOUCH CONTROLLER**

- Large 4.3" HD graphic touch screen
- Integrated smart connectivity
- Built in online monitoring





#### SIMPLE MAINTENANCE

- Quick access to service
- Suction cooling air flow supports visual inspection with open-door

# VARIABLE SPEED DRD 10-50HP/7.5-37KW



# >>> Technical data

	0	ΗΦ		蕈		••		Ø	<b>M</b>
Model	Max. Pressure	Motor		Capacity		Noise	Weight	Connection	Dimension
	Mpa	hp	kw	I/S	cfm	dB(A)±2	KG		LxWxH(mm)
DRD 10 PM	0.7-1.3	10	7.5	13-20	27-42	73	230	3/4"	1100* 850 * 1080
DRD 15 PM	0.7-1.3	15	11	21-30	44-64	73	231	3/4"	1100* 850 * 1080
DRD 20 PM	0.7-1.3	20	15	27-36	56-77	73	241	3/4"	1100* 850 * 1080
DRD 25 PM	0.7-1.3	25	18.5	42-57	88-120	73	313	1"	1250* 950 * 1180
DRD 30 PM	0.7-1.3	30	22	48-64	101-135	73	321	1"	1250* 950 * 1180
DRD 40 PM	0.7-1.3	40	30	67-94	141-199	74	412	1 1/2"	1330* 950 * 1200
DRD 50 PM	0.7-1.3	50	37	82-107	173-226	73	413	1 1/2"	1330* 950 * 1200

# >>> Variable speed control - Frequency inverter regulation

A frequency driven compressor has a working pattern with lower peaks and a smoother air profile. This is achieved by controlling the air delivery and producing only the amount of air for the customer's application at a daily lower and lower operation. The net pressure is maintained by use of a frequency inverter. As a result, the compressor consumes only the energy needed which is very cost efficient.





## REVOLUTIONARY DRIVE TRAIN TECHNOLOGY

# Improved energy efficiency saves you money

- » In-house designed iPM motor with iPM Super Premium Efficiency.
- » New generation screw elements, with improved efficiency.
- » Integrated direct drive transmission for minimal losses.
- » Smart inlet valve optimizes the inlet flow and improves efficiency.

# Increased reliability extends lifetime

- » iPM motor rated IP66, premium protection against dust and water ingress.
- » Globally renowned screw elements, proven in thousands of installations.
- » Optimal cooling at all speeds and conditions thanks to oil-cooling principle of the iPM motor.

# Maintenance-free design minimizes downtime and improves your productivity

- » Coupling-free direct drive design, no maintenance needed.
- » Smart inlet valve, no maintenance needed.

## >>> DRD 30 PM










Motor

5 Cooler

# >>> We protect your efficiency

Energy costs represent about 70% of the total operating cost of your compressor over a 5 year period. That's why reducing the operating cost of a compressed air solution is a major focus. Variable frequency driven compressors can cut the energy bill of your compressor by up to 30%.

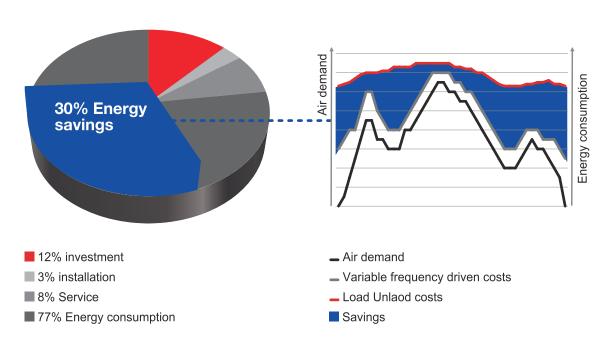

## A TOTAL SOLUTION FOR YOUR QUALITY AIR

# >>> Complete compressor room solutions



#### Line Filters

» Purify the compressed air by eliminating oil/dust contaminants resulting in higher final product quality and an increase of your overall productivity.

#### Air Receiver

» Buffer storage for compressed air. Helps with condensate separation, pressure stabilization and more efficient operation of the compressor.

#### Oil Water Separator

Captures the oil in compressor condensate so it can be disposed of in an safe and environment-friendly way.

#### **AIRnet**

» Fast to install, reliable piping system, designed for compressed air applications offers lowest total cost of ownership.

# >>> Complete your compressed air installation with an ICONS plan

What if your compressor needs service or an immediate intervention? With an ICONS plan, you get an alert from your controller delivered straight to your computer, tablet or smartphone. Wherever you are, you can take immediate action and reduce the risk of downtime and other costs.



#### With connectivity



#### Without connectivity





Oil-injected screw compressor

Fixed speed Range CSM/DRD series

Variable speed Range DRD PM series



- A high quality product offering you technology you can trust.
- Our products are easy to use and guarantee high reliability.
- Distributors are always nearby ensuring availability of both products and support.
- Choosing our high performance products entails a partnership that will boost your business.
- Safeguarding long-term productivity through optimal serviceability and use of original parts.



# Care. Trust. Efficiency.

#### Care

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

#### Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

#### Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.